

PRL-414B, 1:4 FANOUT 50 Ω TTL/CMOS LINE DRIVER

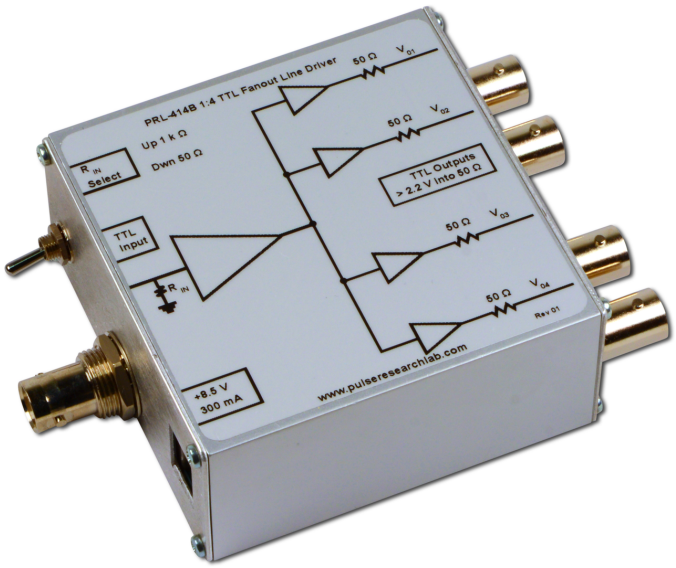

PRL-414B 1:4 TTL Fanout Line Driver

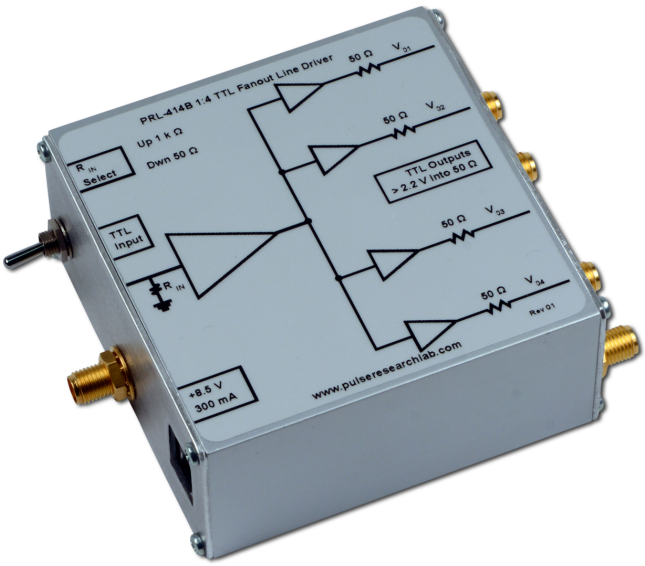

PRL-414B-SMA 1:4 TTL Fanout Line Driver

APPLICATIONS

- TTL/CMOS Clock Distribution
- 1:4 Fanout Line Driver
- High Speed Digital Communications System Testing
- Mini Modular Instrument™

FEATURES

- f_{max} > 135 MHz, typical
- Drives 100 ft of cable @ 80 MHz
- 2 ns Typical Output Rise & Fall Times
- TTL Compatible 50 Ω or 1 kΩ Input
- 500 ps typical channel-to-channel skew
- BNC or SMA I/O Connectors
- DC Coupled I/Os
- Self-contained 1.3 x 2.9 x 2.9-in. unit includes AC/DC Adapter

DESCRIPTION

The PRL-414B is a 1:4 fanout 50 Ω TTL Line Driver. It is intended for distribution of high-speed clock and logic signals to multiple loads via long lines. The 50 Ω back-terminated outputs can drive long lines with or without 50 Ω load terminations. With 50 Ω load terminations, all outputs of the PRL-414B can drive 100 ft of 50 Ω cables at clock rates greater than 80 MHz.

The input resistance of the PRL-414B can be selected to be either 50 Ω or 1 kΩ by a switch. The 1 kΩ input is desirable when interfacing with low power circuits.

All I/Os are DC coupled and have BNC or SMA connectors, as follows:

- PRL-414B, 1:4 Fanout 50 Ω TTL Line Driver, BNC I/Os
- PRL-414B-SMA, 1:4 Fanout 50 Ω TTL Line Driver, SMA I/Os

The PRL-414B is housed in a 1.3 x 2.9 x 2.9-in. extruded aluminum enclosure and is supplied with a PRL-760C, ±8.5 V/±1.8 A AC/DC Adapter, that can power up to four units with additional 88000102-4 DC power cables. If mounting is desired, a pair of the 35001420 mounting brackets can accommodate any two PRL modules of the same length. Please refer to the Accessories section of www.pulseresearchlab.com for more detail.

A block diagram showing the equivalent input and output circuits of the PRL-414B is shown in Fig. 1.

1234 Francisco Street, Torrance, CA 90502
Tel: 310-515-5330 Fax: 310-515-0068
sales@pulseresearchlab.com
www.pulseresearchlab.com

SPECIFICATIONS* (0° C ≤ T_A ≤ 35°C)

Unless otherwise specified, dynamic measurements are made with the input set to 50Ω and all outputs terminated into 50 Ω.

SYMBOL	PARAMETER	Min	Typ	Max	UNIT	Comments
$R_{in\ Low}$	Input Resistance Low Range	49.5	50	50.5	Ω	
$R_{in\ Hi}$	Input Resistance High Range	990	1000	1010	Ω	
Rout	Output Resistance		50		Ω	
V_{IL}	TTL input Low Level	-0.5	0	0.5	V	
V_{IH}	TTL input High Level	2.0	2.4	5.0	V	
V_{OL}	TTL Output Low Level	0	0.25	0.5	V	R_L=50 Ω
V_{OH1}	TTL Output High Level	2.2	2.5		V	R_L=50 Ω@ DC
V_{OH2}	TTL Output High Level	4.4	5		V	R_L=1 MΩ@ DC
I_{DC1}	DC Input Currents		280	350	mA	f ≤ 100 MHz
I_{DC2}	DC Input Currents		220	250	mA	f =50 MHz sq. wave(1)
V_{DC}	DC Input Voltages	7.75	8.5	12	V	
V_{AC}	AC/DC Adaptor Input Voltage	103	115	127	V	
T_{PLH}	Propagation Delay to output ↑		10	12	ns	
T_{PHL}	Propagation Delay to output ↓		8	12	ns	
t_r/t_f	Rise/Fall Times (10%-90%)		2.2/1.8	3	ns	f =50 MHz sq. wave
T_{SKEW}	Skew between any 2 outputs		500	1500	ps	f =50 MHz sq. wave
F_{max1}	Max. Clock Frequency(2)		100	120	MHz	RG58C/U Cable length =3 ft
F_{max2}	Max. Clock Frequency(3)		80			RG58C/U Cable length =100 ft
PWmin	Minimum Pulse Width		4		ns	↑ Input
PWmin	Minimum Pulse Width		6		ns	↓ Input
	Size	1.3 x 2.9 x 2.9			in.	
	Weight	5			Oz	

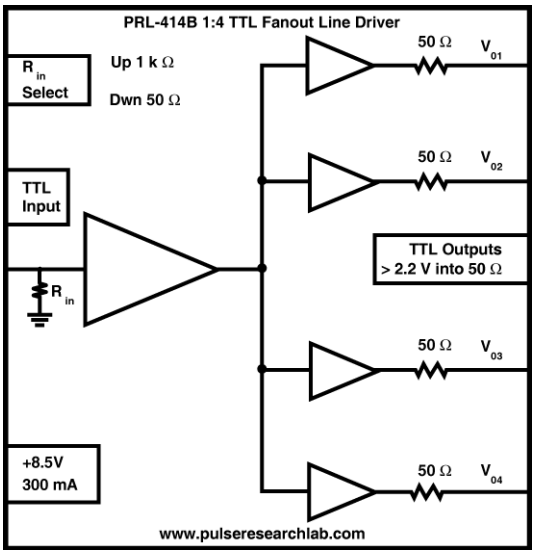


Fig. 1: PRL-414B Functional Block diagram

Notes:

(1). For sharing a single PRL-760C, ±8.5 V, ±1.8 A AC/DC adapter, the total current should not exceed 1.8 A.

(2). f_{MAX} should not exceed 120 MHz; otherwise, damage of the unit due to overheating may result.

(3). f_{MAX2} is measured by connecting a second PRL-414B at the end of the 100 ft cable.

Ordering Information:

- The PRL-414B may be ordered without the power supply as part number PRL-414B-OEM or PRL-414B-SMA-OEM.
- The PRL-414B may also be ordered with a guaranteed ≤500 ps channel to channel skew, by appending "-500ps" to the model number, e.g. PRL-414B-500ps or PRL-414B-SMA-500ps. An additional charge will apply.

1234 Francisco Street, Torrance, CA 90502
Tel: 310-515-5330 Fax: 310-515-0068
sales@pulseresearchlab.com
www.pulseresearchlab.com